




Z1188-ST-93

75 GPM LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK & CUSTOM HEIGHT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

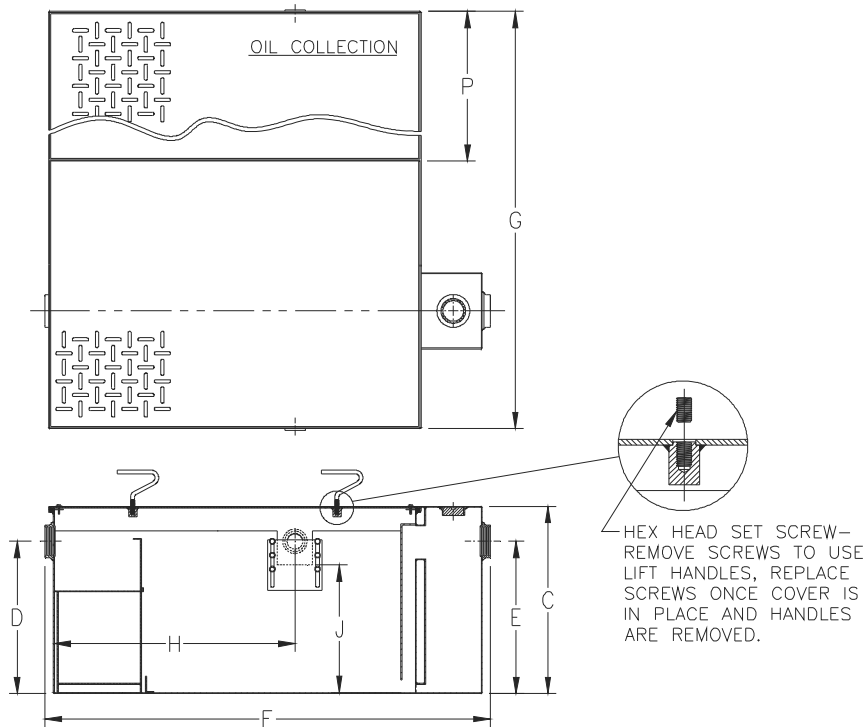

Flow Rate GPM [L] Min.	Oil Storage Tank Cap Gal. [L]	No. of Covers		Inlet / Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs [kg]	Dimensions in Inches [mm]						
		Trap	Tank				C	D/E	F	G	H	J	P
75 [284]	125 [473]	1	1	3 [76]	183 [693]	790 [358]	36 [914]	26-1/2 [673]	51-3/8 [1305]	65-3/8 [1661]	29-1/4 [743]	23-1/2 [597]	25-3/4 [654]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-93

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, adjustable oil draw-off, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ -HD Heavy-duty traffic cover rated at 10,000 lbs. maximum safe live load. An increased 'C' dim. is required when -HD option is specified. (See -HD option specification sheet)
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified. (Specify 'C' Dim. height required.)
- ___ -STR Storage tank on right hand side when facing the inlet.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 05/22/13	C.N. NO. 129397
PROD. / DWG. NO. Z1188-ST-93		

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292