




Z150-147

14 [356] SQUARE TOP PROM-DECK DRAIN W/ (2) STATIC EXTENSIONS, SECONDARY CLAMPING COLLAR, HEEL-PROOF GRATE, AND TOP-SET® DECK PLATE

SPECIFICATION SHEET

TAG _____

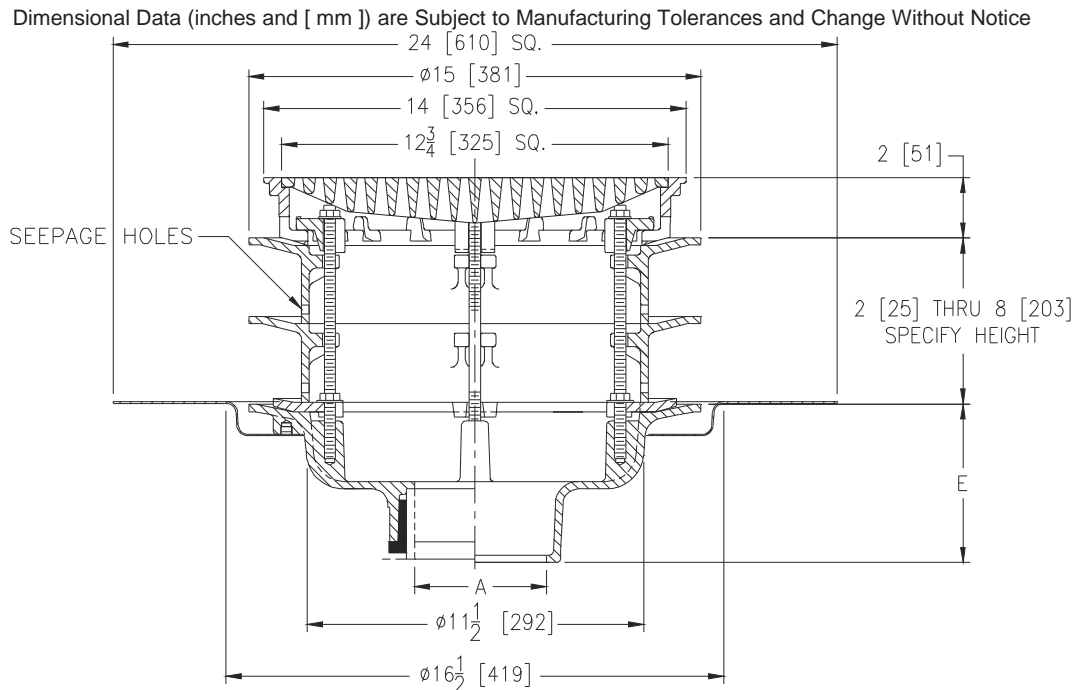

A Pipe Size in [mm]	Approx wt. lbs [kg]	Grate Open Area in ² [cm ²]
2,3,4 [51,76,102]	68 [31]	44 [284]
5,6 [127,152]		
8 [203]	70 [32]	

ENGINEERING SPECIFICATION: ZURN Z150-147

14 [356] Square Top Prom-Deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps, secondary clamping collar, (2) static extensions w/ seepage holes, heavy-duty heel proof grate, and top-set® deck plate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4,5,6,8 [51,76,102,127,152,203]
- 2,3,4,5,6,8 [51,76,102,127,152,203]
- 2,3,4,5,6,8 [51,76,102,127,152,203]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- ___ IC Inside Caulk
- ___ IP Threaded
- ___ NH No-Hub
- ___ NL Neo-Loc

E BODY HT. DIM.

- 5-1/4 [133]
- 3-3/4 [95]
- 5-1/4 [133]
- 4-9/16 [116]

PREFIXES

- ___ Z D.C.C.I. Body with Top*
- ___ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 [51] Dim & 3/8 [10] to 14 [356] Dim.)
- ___ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 [51] Dim. & 3/8 [10] to 14 [356] Dim.)

SUFFIXES

- | | |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| ___ -AR Acid Resistant Epoxy Coated | ___ -G Galvanized Cast Iron |
| ___ -DB Deep Sump body | ___ -HF High Flow Ductile Iron Grate
(Open Area = 61 in ² [394 cm ²]) |
| ___ -DG Duresist Grate | ___ -S Secondary Strainer |
| ___ -DR Top-Set® Drain Riser
(Adjustment from 3-5/8 [92] to 7-1/4 [184]) | ___ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only) |
| ___ -DT Decorative polished Top (ZB and ZN Only) | ___ -TS Top Secured with Slotted Screws |
| ___ -DX Dex-o-tex Flange (ZB and ZN Only) | ___ -VP Vandal Proof Secured Top |
| ___ -EA Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89] | ___ -XJ Vertical Expansion Joint (See Z190) |
| ___ -EB Top-Set® Adjustable Extension Assembly | ___ -Y Sediment Bucket |
| | ___ -90 90° Threaded Side Outlet Body
(2 [51] thru 6 [152]) |

* Regularly furnished unless otherwise specified.