




Z1187-SI-105

SAND INTERCEPTOR W/23 [584] INTEGRAL EXTENSION, VANDAL-PROOF SOLID COVER, REMOVABLE SEDIMENT BASKET, AND NO-HUB CONNECTIONS

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

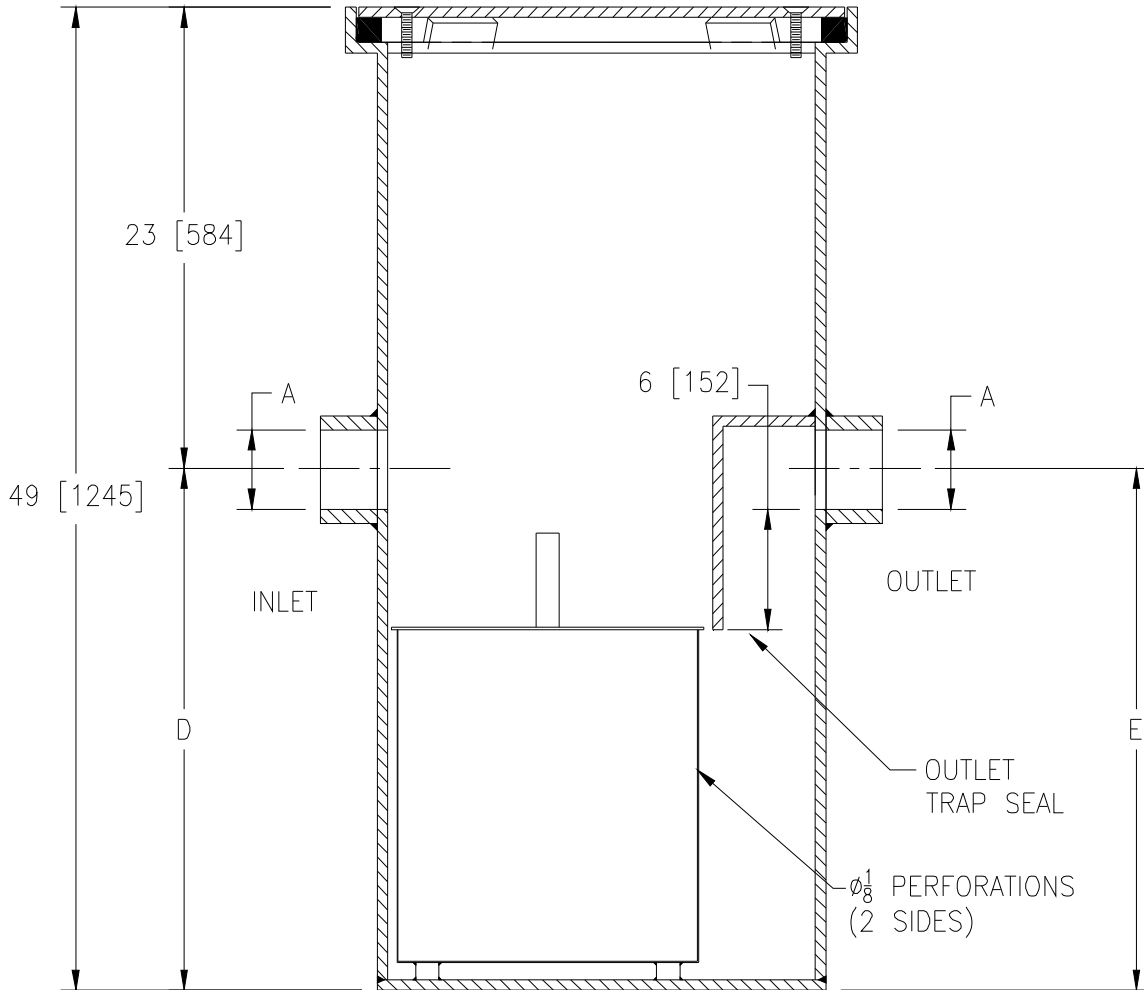

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	Length	D/E	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Covers	Width
20	20 [76]	3 [76]	24 [610]	26 [660]	60 [227]	2	24 [610]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-105

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with No-Hub inlet and outlet, complete with removable Heavy-Duty gasketed traffic cover rated at 10,000 lb [4536 kg] maximum safe live load, removable perforated sediment basket, secured with vandal proof screws, and integral extension.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -DG Duresist Grate

REV.	DATE: 09/08/10	C.N. NO. 111673
DWG. NO. 302272	PRODUCT NO. Z1187-SI-105	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED