





Z9A-NT-E-MWY

NEUTRALIZATION TANK W/ FLANGED EXTENSION AND MANWAY ACCESS COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

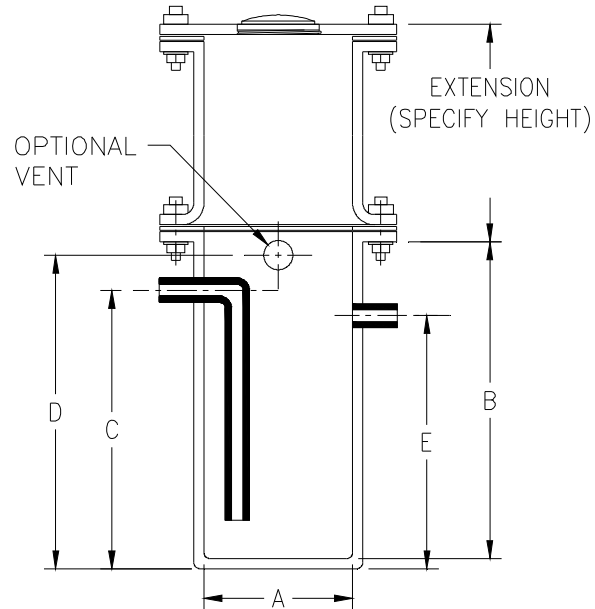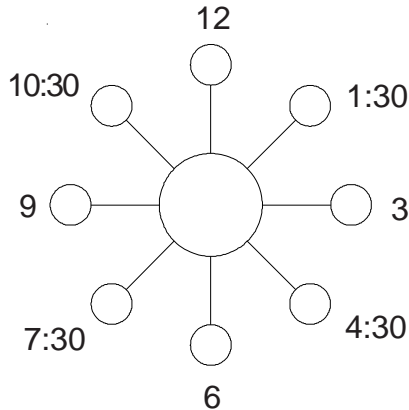

ENGINEERING SPECIFICATION: ZURN Z9A-NT-E-MWY

Neutralization Tank with _____ gallon capacity, having _____ " inlet and outlet and _____ " vent connections with seamless construction is manufactured from high density polyethylene. Top flanged extension is complete with gasketed, bolt down cover. Regularly furnished with stainless steel hardware and neoprene gasket material.

SUFFIXES

____ - FRP Fiberglass Wrap

SPECIFY I/O/V CONNECTION TYPE

- ____ - P.E. Plain End For Mechanical Joint Conn. (1-1/2, 2, 3, 4) [38, 51,76, 102]
- ____ - F.L.G. Flange Conn. (1-1/2, 2, 3, 4, 6) [38, 51,76, 102]
- ____ - M.T. Male N.P.T. Thread (1-1/2, 2, 3, 4) [38, 51,76, 102]
- ____ - F.T. Female N.P.T. Thread (1-1/2, 2, 3) [38, 51,76]

Model Number	Gallon Cap. [liter]	Inlet/Outlet In. [mm]	Approx. Wt. lbs [kg]	Wall Thk.	A	B	C	D	E
					In. [mm]				
__ Z9A-NT-05	5 [19]	1-1/2 [38] or 2 [51]	20 [9]	3/16 [5]	11 [279]	14 [356]	11 [279]	12 [305]	8 [203]
__ Z9A-NT-15	15 [57]	1-1/2 [38] or 2 [51]	25 [11]	3/16 [5]	18 [457]	15 [381]	11 [279]	12 [305]	8 [203]
__ Z9A-NT-30	30 [114]	3 [76]	30 [14]	3/16 [5]	18 [457]	29 [737]	23 [584]	25 [635]	19 [483]
__ Z9A-NT-55	55 [208]	4 [102]	50 [23]	3/16 [5]	22 [559]	36 [914]	27 [687]	31 [787]	23 [584]
__ Z9A-NT-100	100 [379]	4 [102]	85 [39]	1/4 [6]	28 [711]	42 [1067]	35 [889]	37 [940]	31 [787]
__ Z9A-NT-150	150 [568]	4 [102]	100 [45]	1/4 [6]	31 [787]	48 [1219]	38 [965]	42 [1067]	34 [864]
__ Z9A-NT-175	175 [662]	4 [102]	125 [57]	1/4 [6]	30 [762]	57 [1448]	49-1/2 [1257]	53-1/2 [1360]	46-1/2 [1181]
__ Z9A-NT-200	200 [757]	4 [102] or 6 [152]	125 [57]	1/4 [6]	36 [914]	48 [1219]	38 [965]	42 [1067]	34 [864]
__ Z9A-NT-275	275 [1041]	4 [102] or 6 [152]	160 [73]	1/4 [6]	42 [1067]	48 [1219]	38 [965]	42 [1067]	34 [864]
__ Z9A-NT-300	300 [1136]	4 [102] or 6 [152]	175 [79]	5/16 [8]	36 [914]	74 [1880]	61 [1549]	65 [1651]	56 [1422]
__ Z9A-NT-350	350 [1325]	4 [102] or 6 [152]	200 [91]	5/16 [8]	48 [1219]	48 [1219]	38 [965]	42 [1067]	34 [864]

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
 In Canada | Zurn Industries Limited
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
 Date: 03/03/18
 C.N. No. 139692
 Prod. | Dwg. No. Z9A-NT-E-MWY