




Z-1325-77

GROUND HYDRANT

Encased, Vari-Temp, Non-Freeze

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

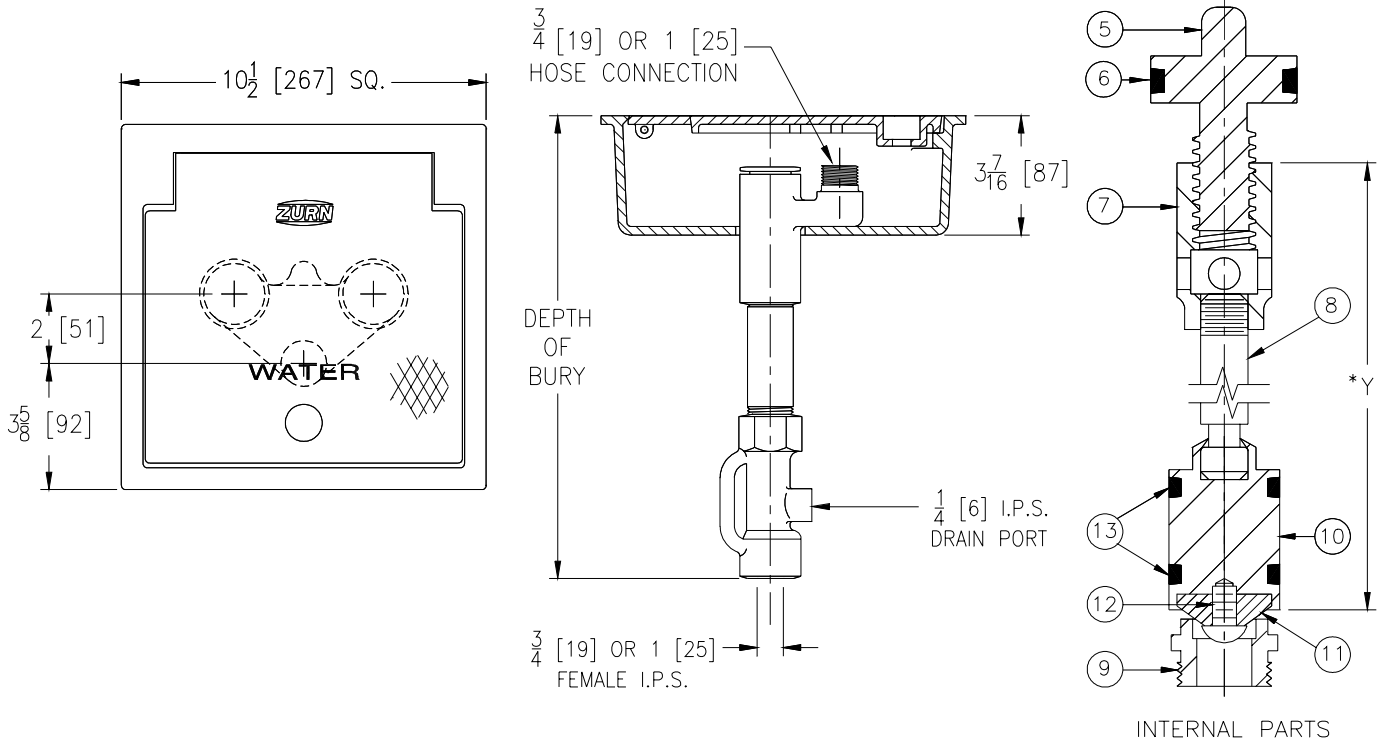

Depth of Bury Feet	Approx. Wt. Lbs. [kg]
2 [610]	20 [9]
3 [914]	23 [10]
4 [1219]	28 [13]
5 [1524]	36 [16]
6 [1829]	41 [19]
7 [2134]	46 [21]
8 [2438]	50 [23]
9 [2743]	55 [25]
10 [3048]	59 [27]

ENGINEERING SPECIFICATION: ZURN Z-1325-77 Encased "Vari-Temp" combination hot and cold water, non-freeze, ground hydrant for flush with grade or finished (non-traffic) floor installation. Complete with bronze casing, all bronze interior parts, bronze seat and replaceable seat washer with 3/4 [19] or 1 [25] connection and non-turning operating rod with free-floating compression closure valves. Plain bronze box and hinged scoriated cover with operating key lock and "WATER" cast on cover. Hydrant is equipped with a tapped 1/4[6] drain port in valve housing.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -K Flashing Flange Only
- ___ -KC Flashing Flange with Clamping Collar
- ___ -RK Hydrant Parts Repair Kit
- ___ -5 3/4 [19] Adapter Vacuum Breaker
- ___ -6 Polished Bronze Box
- ___ -8 D.C.C.I. Box and Cover
- ___ -10 Polished Nickel Box
- ___ -17 1/4 [6] Drain Port in Box
- ___ -21 3/8 [10] Drain Port in Box
- ___ -22 1/2 [13] Drain Port in Box

PARTS LIST

Item	Name	Quan.
5	Operating Screw	1
6	O-Ring	1
7	Operating Coupling	1
8	Operating Rod	1
9	Removable Seat	1
10	Washer Guide	1
11	Washer (neoprene)	1
12	Screw	1
13	O-Ring	2

REV.	DATE: 1/4/00	C.N. NO. 84070
DWG. NO. P-14763 PRODUCT NO. Z-1325-77		

*WHEN ORDERING REPLACEMENT PARTS SPECIFY Y DIM.