Z1231-EZR-81




SPECIFICATION SHEET

CONCEALED ARM CARRIER SYSTEM FOR WALL HUNG LAVATORY WITH RIGID UPRIGHTS, ADJUSTABLE HEADER PLATES & 9-3/8 [238] SLEEVE LENGTH

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

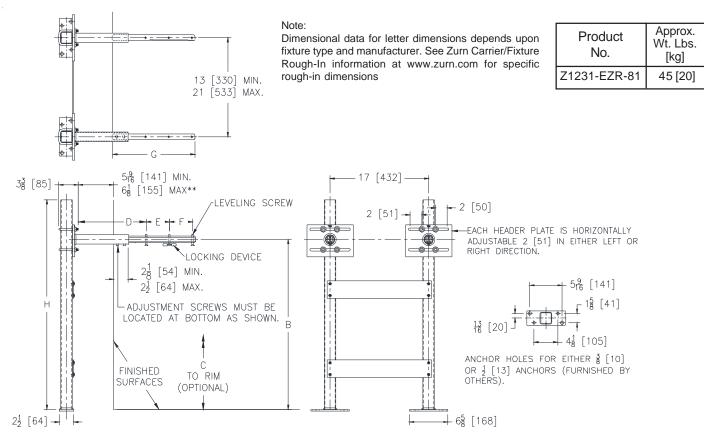

ENGINEERING SPECIFICATION: ZURNZ1231-EZR-81

Wall Hung Lavatory Support System complete with Dura-Coated upright supports made from structural carbon-steel square tubing, conforming to ASTM A500 Grade C standards, with welded steel plate mounting feet featuring separate bolt patterns for using either 3/8" [10mm] or 1/2" [13mm] anchors, both meeting OSHPD spacing requirements. Includes lower and upper Rigid installation plates, for accurate upright spacing. Individual slotted header plates with integral 9-3/8" [238mm] welded arm sleeves provide 2" [51mm] of additional horizontal adjustment per plate allowing for a total horizontal adjustment range of 13" [330mm] to 21" [533mm]. Arms are Dura-Coated cast iron and include leveling screws and soft-set elastomeric locking devices. Uprights, Rigid installation plates, and header plates are all factory assembled for easy installation. Carrier system exceeds load and deflection requirements when tested in accordance to ASME Standard A112.6.1M at any adjustment position.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z Dura-Coated System with Support Plate*

SUFFIXES

AL	Adapter Lug	E6	Conc
CU	Floor to Ceiling Upright (Specify Height Required)	-WL	Waste
D	Back to Back System	WS	Wall S
E2	Concealed Arm Escutcheons 2 [51] Long		(Spec
E4	Concealed Arm Escutcheons 4 [102] Long	79	Parap

* Regularly furnished unless otherwise specified.

Concealed Arm Escutcheons 6 [152] Long Waste Line Sleeve Wall Support Valve Plate (Specify Valve Name and Number) Paraplegic Rough-In

Rev. -Date: 02/02/2019 C.N. No. 141045 Prod. | Dwg. No. Z1231-EZR-81