


ZA880-92 1-5/8[48] WIDE REVEAL TRENCH DRAIN SYSTEM WITH 3 [76] OVERALL HEIGHT

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES

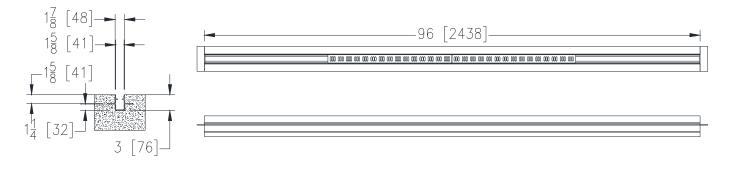

ENGINEERING SPECIFICATION: Zurn ZA880-92

Channels shall be 96" [2438mm] long, 1-7/8" [48mm] wide reveal, 1-5/8" [41mm] throat, and have a 2-7/8" [73mm] invert. Modular channel sections shall be made of 0% water absorbent Aluminum Alloy T-6063T5. Shall have a positive mechanical connection that will not separate during the installation. Channels shall weigh less than 2 lbs.[0.91 kg] per linear foot, have a Manning's coefficient of 0.002 and neutral 0% built in slope. Channels shall be flanged on both sides to mechanically lock into the concrete surround. Shall be provided with standard BZ Bronze Decorative grates that do not lock down and not intended for dynamic traffic loading. Zurn 1-7/8" [48mm] wide reveal Bronze Decorative Grate conforming to ASTM specification B584 Copper Alloy No. 844. Decorative Bronze grate is rated class A per the DIN EN1433 top load classifications. Supplied in 24" [610mm] with 3/4" [19mm] bearing depth. Grate has an open area of 2.26 sq. in per ft. [4,773 sq. mm per meter]. Trench is anodized after extrusion to match grate color. Trench and grate shall be produced in the U.S.A.

PREFIX OPTIONS (Check/specify appropriate options)

Z Eight-foot, Extruded Aluminum *

SUFFIX OPTIONS (Check/specify appropriate options)

Outlet Adapters Add/Each

- _____ -E1 Closed End Cap
- _____ -U1.5 1-1/2 [38] No-Hub Bottom Outlet

Grate Options (Load Classifications are per DIN EN1433)

- _____ -AWG Aluminum Wire Grate Class A
- _____ -AZ Aluminum Decorative Grate Class A
- -BZ Bronze Decorative Grate Class A*
- _____ -NBZ Nickel Bronze Decorative Grate Class A

Miscellaneous Options

- _____ -K 1/8 [3] Weep Hole Above Flange
- _____ -KC Clamp Collar and Pan (includes-K)
- ____ -LF Leveling Feet

* Regularly furnished unless otherwise specified.

