




Z415S-86

BODY ASSEMBLY W/ "TYPE S" STRAINER, BUCKET & EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

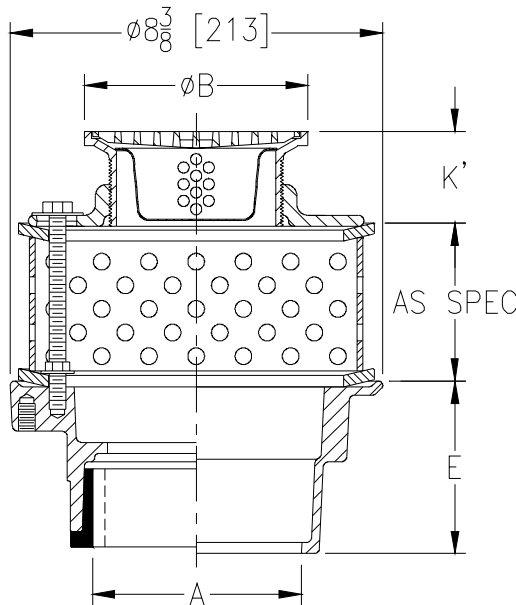

Dimensions In Inches				Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	B x B' Strainer Top Size	K'			
		Min.	Max.		
2-3 [51-76]	5 x 5 [127 x 127]	1 1/2 [38]	2 5/8 [67]	12 [5]	9 [58]
2-3-4 [51-76-102]	6 x 6 [152 x 152]	1 5/8 [41]	2 7/8 [73]	13 [6]	13 [84]
2-3-4 [51-76-102]	7 x 7 [178 x 178]	1 5/8 [41]	3 1/2 [89]	14 [6]	21 [135]
3-4 [76-102]	8 x 8 [203 x 203]	2 [51]	3 1/2 [89]	15 [7]	28 [181]
6 [152]	9 x 9 [229 x 229]	2 [51]	3 1/2 [89]	19 [9]	28 [181]
6 [152]	10 x 10 [254 x 254]	2 [51]	3 1/2 [89]	21 [10]	28 [181]

ENGINEERING SPECIFICATION:
ZURN ZN415S-86 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, flat clamping collar, stainless steel perforated extension, secondary clamping collar, combination invertible membrane clamp and adjustable collar with "TYPE S" polished nickel bronze square strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 3 7/8 [98]
- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [67]
- 2 7/8 [73]
- 2 3/4 [70]
- 3 7/8 [98]
- 4 5/8 [117]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/Polished Nickel Bronze Top*

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -CP Chrome-Plated Bronze Top
- _____ -DP Decorative Polished Top
- _____ -G Galvanized Cast Iron
- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -TC Neo-Loc Test Cap Gasket (2 [50] - 4 [100] NL Outlet Only)
- _____ -V Backwater Valve
- _____ -VP Vandal-Proof Secured Top

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 7/12/04	C.N. NO. 92353
DWG. NO. P-15072 PRODUCT NO. Z415S-86		

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292