


## Z1183-91

SPECIFICATION SHEET

## SOLIDS INTERCEPTOR WITH DISPOSABLE FILTER BAGS FOR COFFEE GROUNDS

TAG \_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

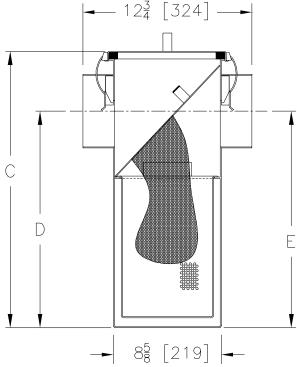

G=WIDTH OF BODY

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. of Basket Cubic Ft. [m³]	Dimensions In Inches			No. of Filter Bags
				С	G	D/E	Per Unit
100	2 [50]	4 [15]	0.20 [.006]	10 [254]	9 7/8 [251]	7 1/4 [184]	1
200	2 [50]	7 [26]	0.29 [.008]	11 1/8 [283]	11 7/8 [302]	8 1/8 [206]	2
300	3 [75]	10 [38]	0.33 [.009]	11 3/4 [298]	14 [356]	8 1/4 [210]	2
400	3 [75]	15 [57]	0.38 [.011]	13 3/8 [340]	16 3/4 [425]	9 3/8 [238]	2
500	3 [75]	20 [76]	0.66 [.019]	15 [381]	17 1/4 [438]	11 3/4 [298]	2
600	4 [100]	25 [95]	0.79 [.022]	17 [432]	19 15/16 [507]	12 7/16 [316]	3
700	4 [100]	35 [132]	1.17 [.033]	18 3/4 [476]	22 1/2 [572]	14 3/16 [360]	3
800	4 [100]	50 [189]	1.35 [.038]	21 1/2 [546]	22 1/2 [572]	16 [406]	3
900	4 [100]	75 [284]	1.61 [.046]	22 3/4 [578]	22 1/2 [572]	18 1/2 [470]	3

**ENGINEERING SPECIFICATION**: ZURN Z1183-91 Acid resistant coated fabricated steel, or stainless steel, solids interceptor, for on floor or semi-recessed installation with low micron replaceable filter bags, retainer plate, latched lid, and removable sediment basket. Size to be used with corresponding Z1170 grease Interceptor.

PREF	IXES
------	------

 Ζ	Acid Resistant Coated Fabricated Steel*
78	All Type 304 Fahricated Stainless Steel

## **SUFFIXES**

\_\_\_\_\_ -XB Extra Solids Interceptor Basket.

\_ -XXF Extra Supply of 30 Low Micron Solids Filter Bags.

<u>CAUTION:</u> Solids interceptor must be maintained periodically in order to ensure proper operation of the system.

Cleaning schedule based on usage.

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 12/20/06 C.N. NO. 95979

DWG. NO. P-15361 PRODUCTNO. Z1183-91