





Z100-301

Ø15 [381] MAIN ROOF DRAIN LOW SILHOUETTE DOME
W/ CUSTOM DRILLED TOP-SET® DECK PLATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

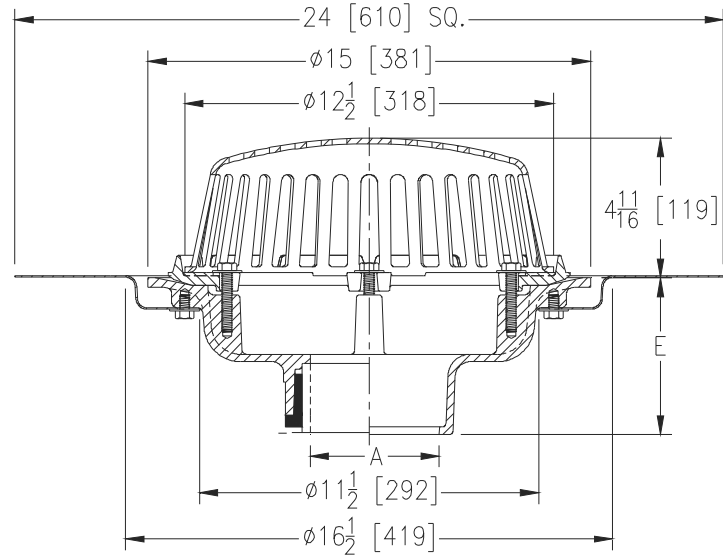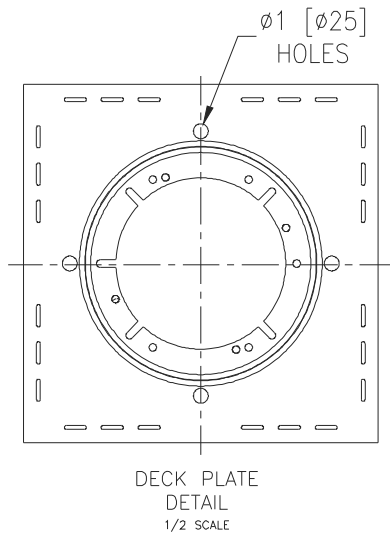

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	36 [16]	103 [665]
5,6 [127,152]	37 [17]	
8 [203]	38 [17]	

ENGINEERING SPECIFICATION: ZURN Z100-301

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, custom drilled Top-Set® deck plate, and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4,5,6,8 [51,76,102,127,152,203]
2,3,4,5,6,8 [51,76,102,127,152,203]
2,3,4,5,6,8 [51,76,102,127,152,203]
2,3,4 [51,76,102]
6 [152]

(Specify size/type) OUTLET

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc
_____ NL Neo-Loc

E BODY HT. DIM.

5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-9/16 [116]
5-7/16 [112]

PREFIXES

_____ Z D.C.C.I. Body with Poly-Dome*
_____ ZA D.C.C.I. Body with Aluminum Dome
_____ ZC D.C.C.I. Body with Cast Iron Dome
_____ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Finish
_____ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator
_____ -BS Bronze Mesh Screen Over Dome
_____ -DR Top-Set® Drain Riser
_____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
_____ -EA Adjustable Extension Assembly
1-3/4 [44] thru 3-1/2 [89]
_____ -ES Static Extension with Secondary Clamp
_____ -FG Flush Grate
_____ -G Galvanized Cast Iron
_____ -GD Galvanized Cast Iron Dome

_____ -HD 6-3/4 [171] High Aluminum Dome
(148 Sq. In. [955 cm²] Open Area)
_____ -SC Secondary Clamping Collar
_____ -SS Stainless Steel Mesh Screen Over Dome
_____ -VP Vandal Proof Secured Top
_____ -W2 2 [51] Internal Water Dam
_____ -W3 3 [76] Internal Water Dam
_____ -W4 4 [102] Internal Water Dam
_____ -XJ Vertical Expansion Joint (See Z190)
_____ -84 Stainless Steel Perforated Gravel Guard
_____ -85 Stainless Steel Perforated Extension
_____ -89 2 [51] High External Water Dam
_____ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified.