




Z1183-77 RICE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

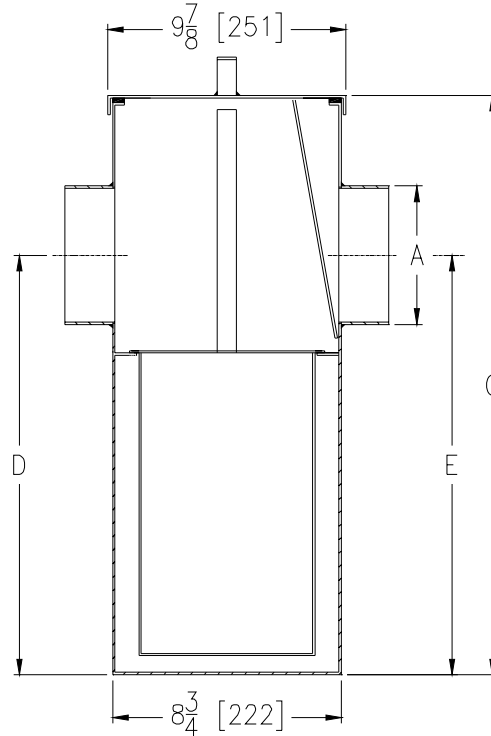

INLET G=WIDTH OF BODY OUTLET

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. Cubic Ft. [m³]	Dimensions In Inches		
				C	G	D/E
100	2 [51]	4 [15]	0.20 [.006]	10 [254]	9 7/8 [251]	7 1/4 [184]
200	2 [51]	7 [26]	0.29 [.008]	11 1/8 [283]	11 7/8 [302]	8 1/8 [206]
300	3 [76]	10 [38]	0.33 [.009]	11 3/4 [298]	14 [356]	8 1/4 [210]
400	3 [76]	15 [57]	0.38 [.011]	13 3/8 [340]	16 3/4 [425]	9 3/8 [238]
500	3 [76]	20 [76]	0.66 [.019]	15 [381]	17 1/4 [438]	11 3/4 [298]
600	4 [102]	25 [95]	0.79 [.022]	17 [432]	19 7/8 [505]	12 7/16 [316]
700	4 [102]	35 [132]	1.17 [.033]	18 3/4 [476]	22 1/2 [572]	14 3/16 [360]
800	4 [102]	50 [189]	1.35 [.038]	21 1/2 [546]	24 1/2 [622]	16 [406]
900	4 [102]	75 [284]	1.61 [.046]	22 3/4 [578]	24 1/2 [622]	18 1/2 [470]

ENGINEERING SPECIFICATION:
ZURN Z1183-77 Large capacity acid resistant coated fabricated steel, or stainless steel, solids interceptor, for on floor or semi-recessed installation cores with .045 [1] diameter holes in screen attached to gasketed, removable, latched lid, and removable sediment basket. Size to be used with corresponding Z1170 or Z1190 Interceptors.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS Stainless Steel

SUFFIXES

- ___ -YR Replacement Bucket Assembly

REV. A DATE: 4/22/05 C.N. NO. 93261
DWG. NO. P-14519 PRODUCT NO. Z1183-77

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED