


Z1360-79 GROUND HYDRANT Encased, Flush Type, Non-Freeze

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

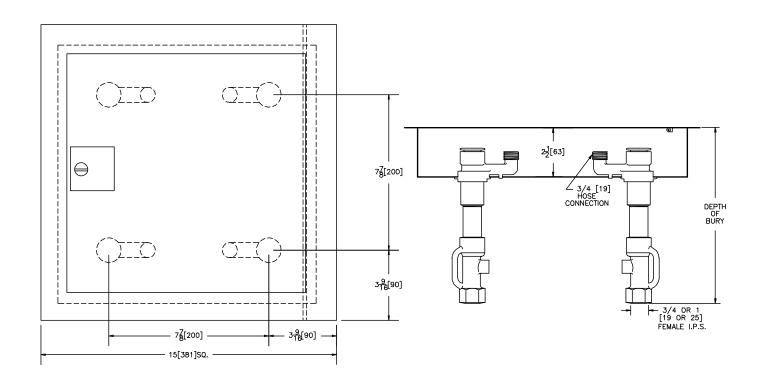

ENGINEERING SPECIFICATION: ZURN Z1360-79

Encased, non-freeze hydrant, for flush with grade or finished (non-traffic) floor installation. Complete with galvanized steel casing, all bronze interior parts, bronze seat and replaceable seat washer, non-turning operating rod with free-floating compression closure valve with 3/4 [19] or 1 [25] connection. Stainless steel box and continuous piano type hinged cover with latch type lock. Hydrant is equipped with a tapped 1/4 [6] drain port in valve housing.

Note:

1. IMPORTANT Hydrant must be opened one turn to seal drain port during use.

OPTIONS (Check/specify appropriate options)

SUFFIXES

AQD	With Opening in Bottom of Box for Air Quick Disconnect Pipe
BC	Bronze Casing
DP14	1/4 [6] Drain Port in Box
RK	Hydrant Parts Repair Kit
VB	3/4 [19] Adapter Vacuum Breaker

REV. A DATE: 05/05/08 C.N. NO. 98441

DWG. NO. P-14223 PRODUCT NO. Z1360-79