


Z1188-145 LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND OIL LEVEL SENSOR

TAG

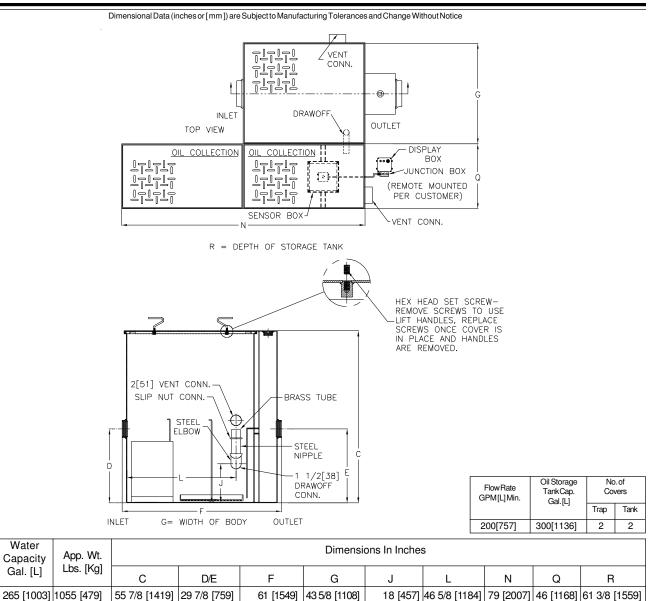

ENGINEERING SPECIFICATION: ZURN Z1188-145 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug, visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off, vent connections and integral storage tank. Secured gasketed non-skid cover complete with flow control fitting. With a fiberglass sensor box containing a float oil level sensor, fiberglass display box with one green power light, one red oil level light, audible alarm and junction box. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

Inlet/

Outlet

Size*

4 [102]

Flow

Rate

GPM [L] Min

200[756]

Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- -E Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- -HD Heavy-duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- -K Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide. No extension required to accomodate -K.

Note: 1. Power supply 120V GFCI

	REV.	DATE: 12/	/11/06	C.N. NO. 95936
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-15358	PRODUCT	ΓNO. Z1188-145
ZURN INDUSTRIES, INC. SPECIFICATION DRAINAGE OPERATION 1801 Pittsburgh Ave. Frie, PA 16514				

Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292