




**Z-100-153**  
**15"[381] DIA MAIN ROOF DRAIN WITH**  
**WATER LEVEL REGULATOR**

SPECIFICATION SHEET

**TAG** \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

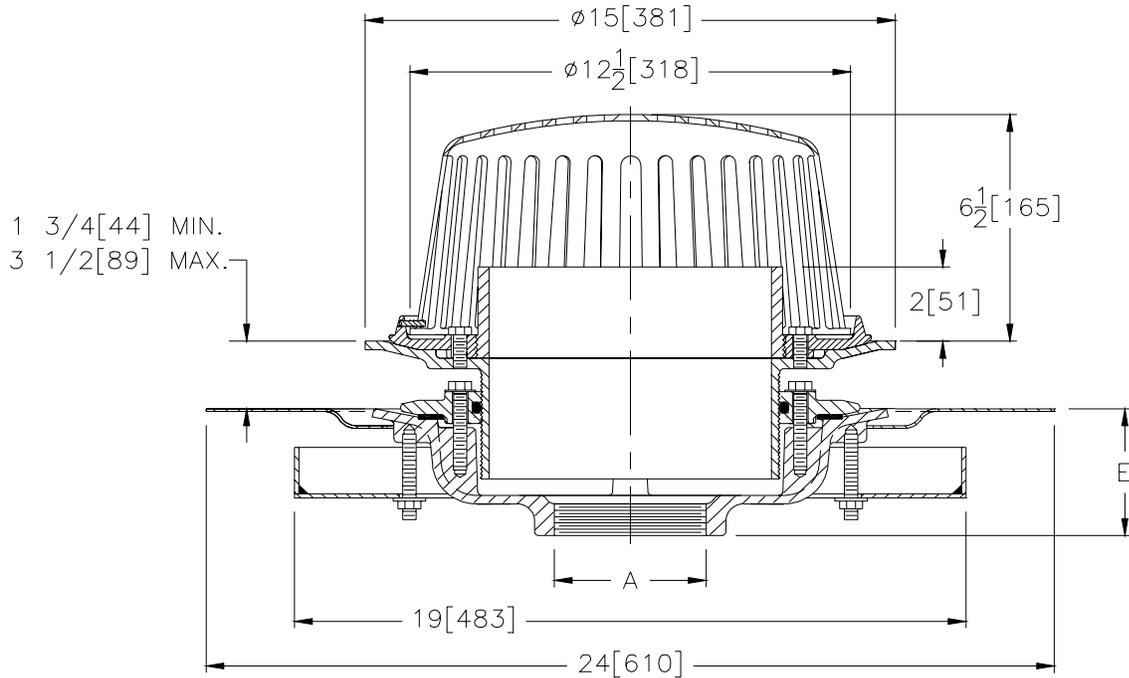

A- Pipe Size In.	Approx. Wt. Lbs.[kg]	Dome Open Area Sq. In.[cm <sup>2</sup> ]
2,3,4 [51,76,102]	28[13]	103[665]
5,6 [127,152]	29[13]	
8 [203]	30[14]	
10 [254]	32[15]	

**ENGINEERING SPECIFICATION: ZURN Z-100-153**

15 [381] Diameter roof drain. Dura-Coated cast iron threaded body with combination membrane flashing clamp/gravel guard 2 [51] internal water dam, underdeck clamp, adjustable extension assembly, roof sump receiver, vandal proof secured top and aluminum dome.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE** (Specify size/type) **OUTLET** **'E' BODY HT. DIM.**  
 2 thru 6, 8, 10 [50 thru 150, 200, 250] \_\_\_\_\_ IP Threaded 3 3/4 [95]

**PREFIXES**

- \_\_\_\_\_ Z- D.C.C.I. Body with Poly-Dome\*
- \_\_\_\_\_ ZA- D.C.C.I. Body with Aluminum Dome
- \_\_\_\_\_ ZC- D.C.C.I. Body with Cast Iron Dome
- \_\_\_\_\_ ZRB- D.C.C.I. Body with Plain Bronze Dome

**SUFFIXES**

- \_\_\_\_\_ -BS Bronze Mesh Screen Over Dome
- \_\_\_\_\_ -E Static Extension 1[25] thru 4[102] (Specify Height)
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -S Secondary Clamp Collar
- \_\_\_\_\_ -SS Stainless Mesh Screen Over Dome
- \_\_\_\_\_ -XJ Vertical Expansion Joint (See Z-190)
- \_\_\_\_\_ -84 Stainless Steel Perforated Gravel Guard
- \_\_\_\_\_ -90 90° Threaded Side Outlet Body (Previously Z-115)

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

<b>REV.</b>	<b>DATE: 8/17/99</b>	<b>C.N. NO. 83036</b>
<b>DWG. NO. P-14741</b>	<b>PRODUCT NO. Z-100-153</b>	

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292