




Z543-90

16 [406] DIAMETER HEAVY-DUTY DRAIN W/ SIDE OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

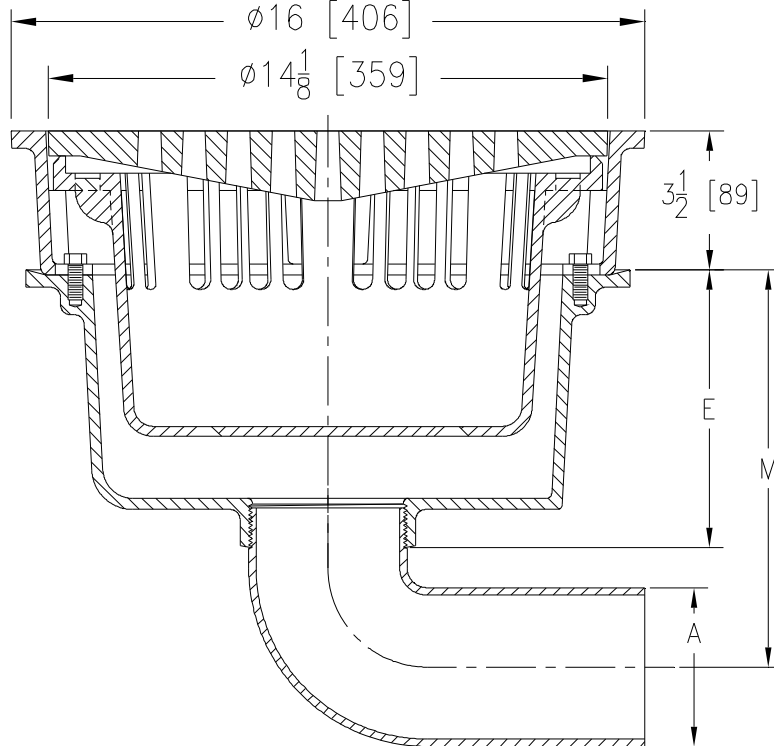

Dimensions in Inches		Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
A Pipe Size	M		
3 [76]	9-5/8 [244]	135 [61]	50 [323]
4 [102]	9-7/8 [251]	135 [61]	50 [323]
5 [127]	10-7/16 [265]	135 [61]	50 [323]
6 [152]	11-1/8 [283]	135 [61]	50 [323]

ENGINEERING SPECIFICATION: ZURN Z543-90

16 [406] Diameter top drain, Dura-Coated cast iron deep sump body with side outlet, seepage pan and combination membrane flashing clamp and frame for heavy-duty cast iron slotted grate with suspended sediment bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3 thru 6 [76 thru 152]

(Specify size) OUTLET

____ NH No-Hub

'E' BODY HT. DIM.

7 [178]

PREFIXES

- ____ Z D.C.C.I. Body and Grate*
- ____ ZB D.C.C.I. Body with Polished Bronze Grate (Add 3/16 [5] to 3-1/2 [89] Dim.)
- ____ ZN D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16 [5] to 3-1/2 [89] Dim.)

SUFFIXES

- ____ -DG Duresist Grate
- ____ -G Galvanized Cast Iron
- ____ -P Trap Primer Connection
- ____ -TS Top Secured with Slotted Screws
- ____ -V Backwater Valve (See Z1099)
- ____ -VP Vandal-Proof Secured Top

REV. B	DATE: 8/10/12	C.N. NO. 124650
DWG. NO. 67290		PRODUCT NO. Z543-90

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED