




Z415I-81

BODY ASSEMBLY W/ "TYPE I" STAINLESS STEEL STRAINER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

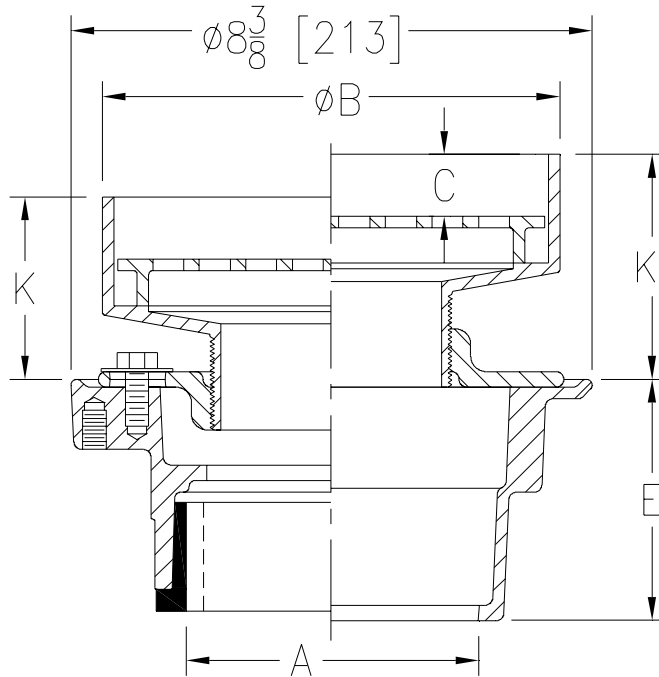

Dimensions In Inches							Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	B Strainer Dia.	C	K		K'			
			Min.	Max.	Min.	Max.		
2-3-4 [51-76-102]	7 [178]	1 [25]	2 1/4 [57]	2 3/8 [60]	3 1/8 [79]	4 1/4 [108]	19 [9]	13 [84]

ENGINEERING SPECIFICATION: ZURN ZN415I-81

Floor and shower drain, Galvanized cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE I" stainless steel strainer with raised flange.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2 thru 4 [51 thru 102]	_____	IC Inside Caulk	3 7/8 [98]
2 [51]	_____	IP Threaded	2 3/8 [60]
3 [76]	_____	IP Threaded	2 5/8 [67]
4 [102]	_____	IP Threaded	2 7/8 [73]
2 thru 4 [51 thru 102]	_____	NH No-Hub	3 7/8 [98]
2 thru 4 [51 thru 102]	_____	NL Neo-Loc	3 3/4 [95]

PREFIXES

_____ Z Galvanized Cast Iron Body Assembly w/ Stainless Steel Top*

SUFFIXES

- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -SR Stabilizer Ring
- _____ -TC Neo-Loc Test Cap Gasket (2 - 4 [51 - 102] NL Bottom Outlet Only)

REV.	DATE: 3/27/07	C.N. NO. 96417
DWG. NO. P-15402 PRODUCT NO. Z415I-81		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED