


## Z1188-159 SIZE 250 LARGE CAPACITY OIL INTERCEPTOR WITH

TAG \_\_\_\_

INTEGRAL EXTENSION AND HEAVY-DUTY COVER

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

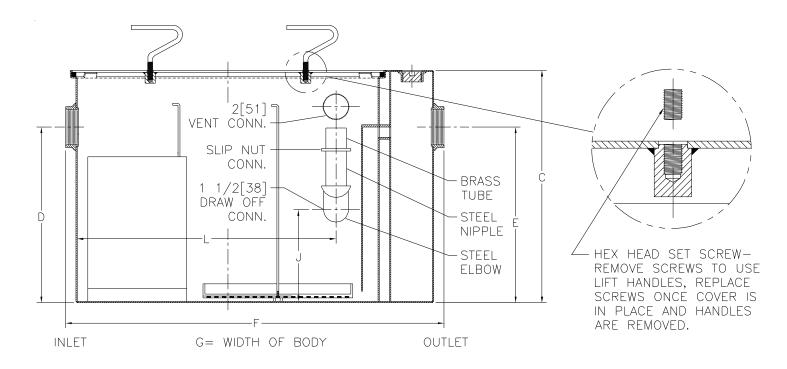

Extension Designation -E		Inlet/ Outlet Size	Water Capacity Gal. [L]	No. of Covers	С	D/E	F	G	J	L
E 27 3/8	250 [946]	6 [152]	460 [1741]	2	68 3/8 [1737]	36 [914]	71 [1803]	51 3/8 [1305]	23 3/8 [594]	56 5/8 [1438]

## ENGINEERING SPECIFICATION: ZURN Z1188-159

Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor with integral extension, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side. Complete with secured, gasketed, non-skid heavy-duty traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load with removable lift handles and flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

## PREFIXES

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

- -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
  -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

	REV.	DATE:	03/17/10	C.N. NO. 110848					
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-15858	PRODUC	CT NO. Z1188-159					
ZURN INDUSTRIES, LLC									