




Z1188-ST-91

LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

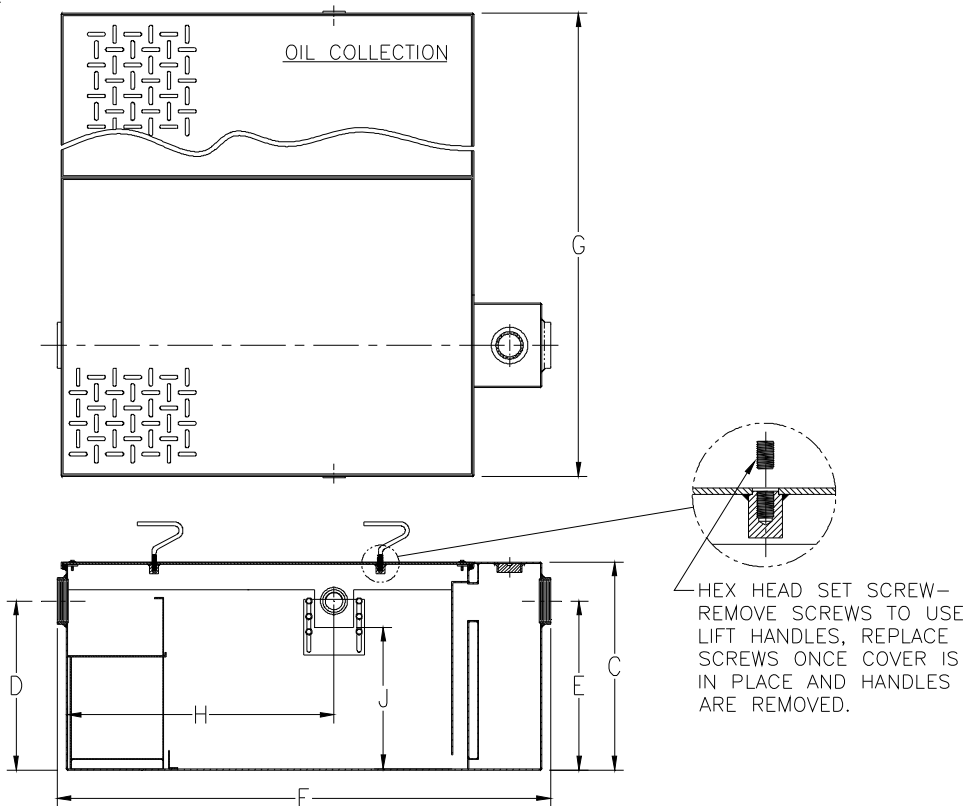

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
75 [284]	125 [473]	1	1

Flow Rate GPM [L] Min.	Inlet/ Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
75 [284]	4 [102]	88 [333]	615 [279]	22-3/4 [578]	18-1/2 [470]	51-3/8 [1305]	65-3/8 [1661]	29-1/4 [743]	15-1/2 [394]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-91

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, adjustable oil draw-off, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___-E Integral Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___-HD Heavy-duty traffic cover rated at 10,000 lbs.[4536 kg.] maximum safe live load. An increased 'C' dim. is required when -HD option is specified. (See -HD option specification sheet)
- ___-K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- ___-KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified. (Specify 'C' Dim. height required.)
- ___-STR Storage tank on right hand side when facing the inlet.

REV.	DATE: 05/17/13	C.N. NO. 129378
PROD./DWG. NO. Z1188-ST-91		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED