


## Z1188-121

**SPECIFICATION SHEET** 

TAG

LARGE CAPACITY OIL INTERCEPTOR
AND DRAW OFF TANK WITH OIL LEVEL SENSOR

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

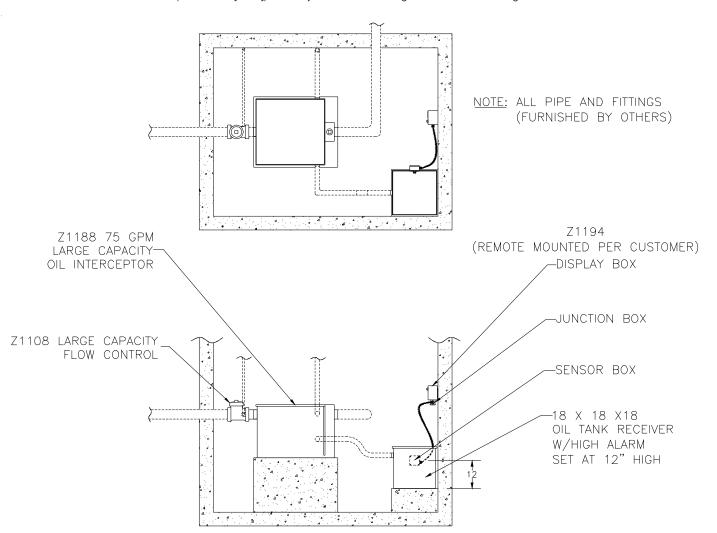

Flow Rate	Inlet/Outlet	Water Capacity	App.Wt.	No. of	Dimensions In Inches					
GPM[L]Min	Size**	Gal. [L]	Lbs. [Kg]	Covers	С	D/E	F	G	J	L
75 [284]	3 [75]	65 [246]	332 [151]	1	22 3/4 [578]	18 1/2 [470]	36 [914]	28 5/8 [727]	8 [203]	25 3/4 [654]

**ENGINEERING SPECIFICATION**: ZURN Z1188-121 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff, vent connections either side, and oil drawoff storage tank with fiberglass display box with one green power light, one yellow and red dual oil level lights, audio alarm and juction box. Secured gasketed non-skid cover complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

## **PREFIXES**

Z Acid Resistant Coated Fabricated Steel\*

REV. DATE: 12/17/03 C.N. NO. 91808

DWG, NO. P-15023 PRODUCTNO, Z1188-121

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED