Z627-99

SPECIFICATION SHEET

ISOLATION DECK ADJUSTABLE HEAVY-DUTY DRAIN W/ SEEPAGE HOLES, SOLID COVER & UNDERDECK CLAMP

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

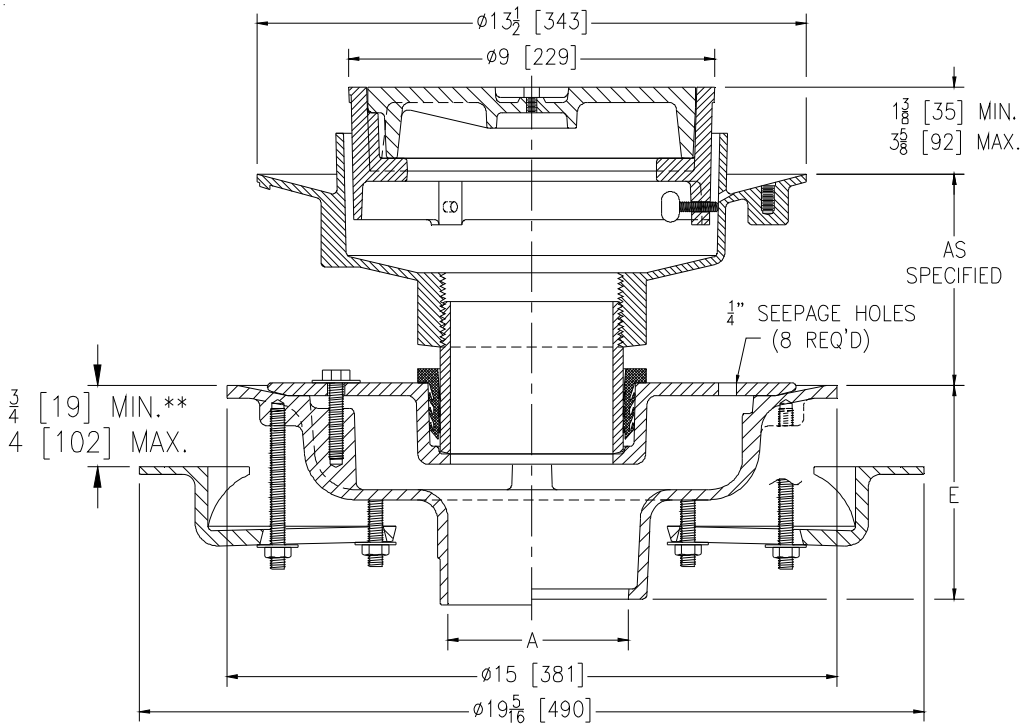

A Pipe Size	Approx. Wt. Lbs. Less Nipple [kg]
2-3-4 [51-76-102]	87 [39]
5-6 [127-152]	

ENGINEERING SPECIFICATION: ZURN Z627-99
Adjustable isolation deck drain, Dura-Coated cast iron upper and lower bodies, clamp collar with seepage holes, neoprene flex gasket, perforated isolation nipple and 8 [203] diameter round solid cover. Lower body to have underdeck clamp.

OPTIONS (Check/specify appropriate options)

PIPE SIZE
2-3-4-5-6 [51-76-102-127-152]
2-3-4-6 [51-76-102-152]
2-3-4-5-6 [51-76-102-127-152]
2-3-4-5-6 [51-76-102-127-152]
2-3-4 [51-76-102]

(Specify size/type) **OUTLET**

____	IC	Inside Caulk
____	IG	Inside Gasket
____	IP	Threaded
____	NH	No-Hub
____	NL	Neo-Loc

'E' BODY HT. DIM.
5-1/4 [133]
5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]

PREFIXES

____	Z	D.C.C.I. Body and Top*
____	ZB	D.C.C.I Body w/Polished Bronze Top (Add 3/16 [5] to 1-3/8 [35] - 3-5/8 [92] dim. & 3/4 [19] to 9 [229] dim.)
____	ZN	D.C.C.I Body w/Polished Nickel Bronze Top (Add 3/16 [5] to 1-3/8 [35] - 3-5/8 [92] dim. & 3/4 [19] to 9 [229] dim.)

SUFFIXES

____	-CC	Clamp Collar (Upper Body)
____	-F	Extension (Upper)
____	-G	Galvanized Cast Iron
____	-R	Sump Receiver (Lower Body)
____	-TS	Top Secured with Slotted Screws
____	-VP	Vandal-Proof Secured Top
____	-Y	Sediment Bucket (Upper)

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 9/23/14
C.N. No. 131628
Prod. | Dwg. No. Z627-99