




Z1187-SI-104

SAND INTERCEPTOR W/ INTEGRAL EXTENSION, HEAVY-DUTY COVER, AND 2" VENT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

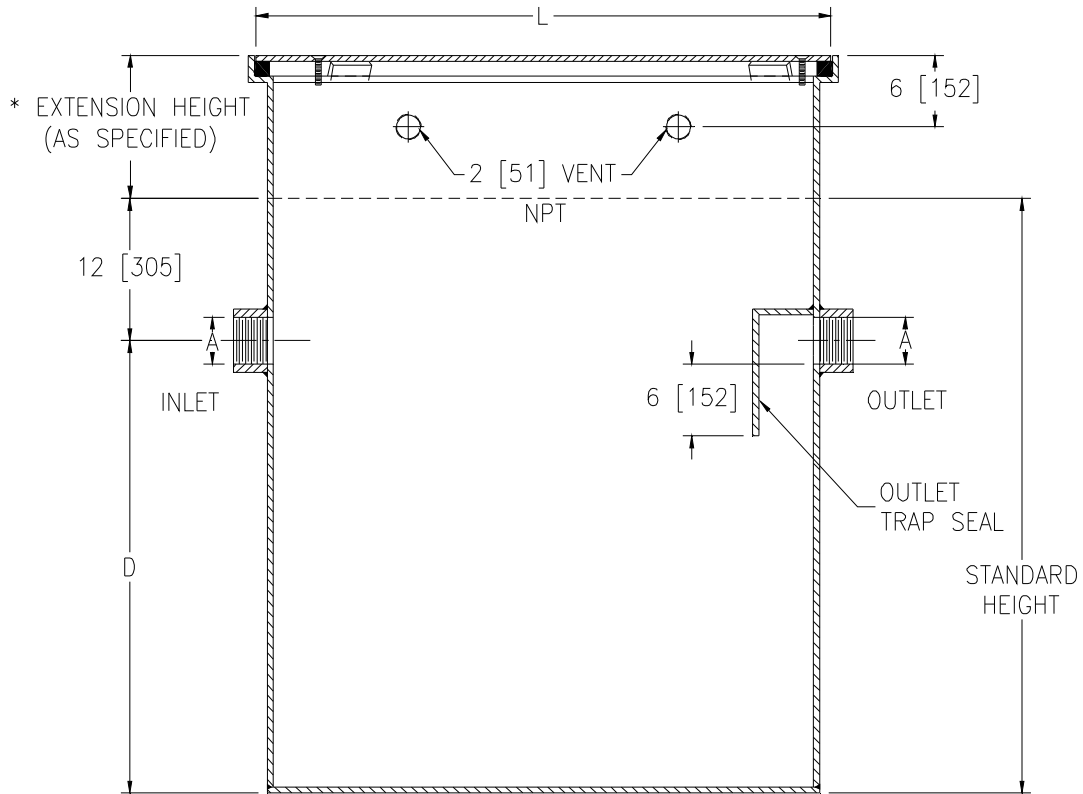

*SPECIFY EXTENSION HEIGHT REQUIRED

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Covers	Width	Approx. Wt. Lbs. [Kg]
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	2	24 [610]	133 [60]
50	50 [189]	4 [102]	48 [1219]	26 [660]	120 [454]	4	24 [610]	204 [92]
150	150 [568]	4 [102]	48 [1219]	38 [965]	360 [1363]	8	48 [1219]	368 [167]
250	250 [946]	6 [152]	72 [1829]	39 [991]	540 [2044]	12	48 [1219]	1294 [587]
500	500 [1893]	6 [152]	120 [3058]	51 [1295]	1200 [4542]	20	48 [1219]	2204 [1000]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-104

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with integral extension, two 2" threaded vent connections on both sides, threaded inlet and outlet, complete with removable heavy-duty gasketed traffic covers rated 10,000 lb [4536 kg] maximum safe live load.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -NH No-Hub Inlet and Outlet (Specify Size)
 ___ -VP Vandal-Proof Screws

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 08/06/10	C.N. NO. 111472
DWG. NO. 301733	PRODUCT NO. Z1187-SI-104	