




# ZN1400-HD-KC

SPECIFICATION SHEET

"LEVEL-TROL" ADJUSTABLE FLOOR CLEANOUT W/  
HEAVY-DUTY TOP AND ANCHOR FLANGE W/ CLAMP COLLAR

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

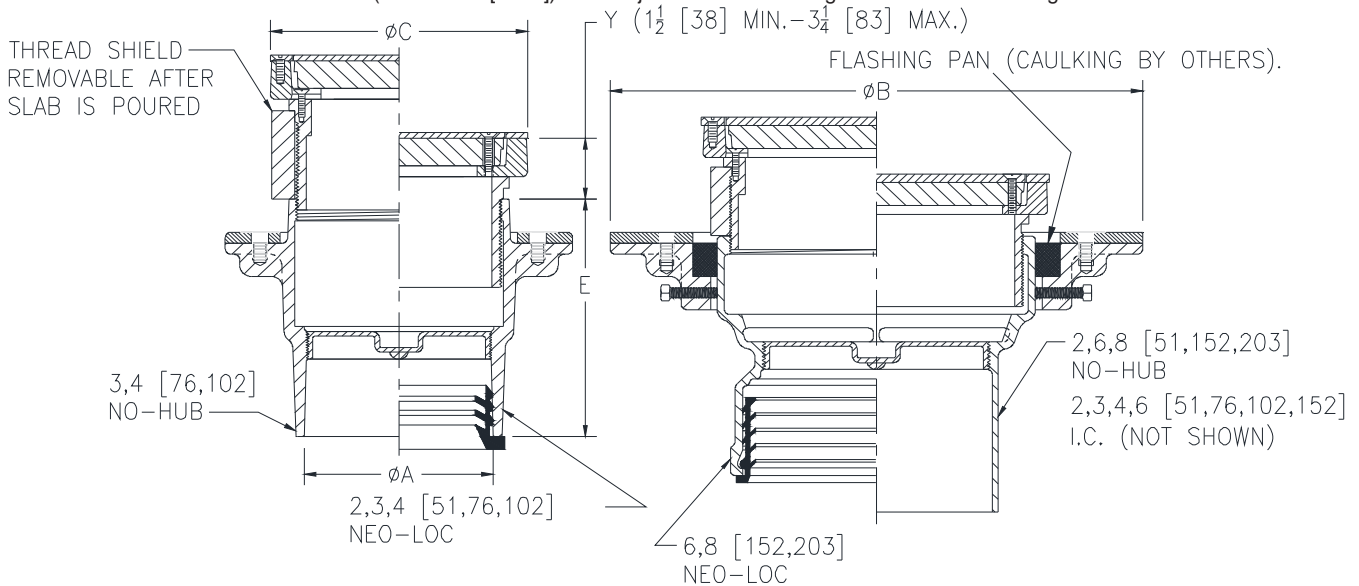

Dimension In Inches[mm]				Approx. Wt. Lbs. [kg.]
A-Pipe Size	B	C	E	
Inside Caulk				
2 [51]	9-1/2 [241]	6-1/8 [156]	6-7/8 [175]	22 [10]
3 [76]	9-1/2 [241]	6-1/8 [156]	6-7/8 [175]	22 [10]
4 [102]	11-1/2 [292]	7-1/4 [184]	6-7/8 [175]	28 [13]
6 [152]	12-1/4 [292]	9-1/4 [235]	6-7/8 [175]	42 [19]
No-Hub				
2 [51]	7-1/2 [191]	4-1/8 [105]	4-5/8 [117]	12 [5]
3 [76]	7-1/2 [191]	5-1/8 [130]	5-3/8 [137]	12 [5]
4 [102]	7-1/2 [191]	5-1/8 [130]	5-3/8 [137]	14 [6]
6 [152]	11-1/2 [292]	8-1/4 [210]	4-3/4 [121]	37 [17]
8 [203]	12-1/4 [311]	9-1/4 [235]	7-1/2 [191]	47 [21]
Neo-Loc				
2 [51]	7-1/2 [191]	5-1/8 [130]	5-3/8 [137]	12 [5]
3 [76]	7-1/2 [191]	5-1/8 [130]	5-3/8 [137]	14 [6]
4 [102]	7-1/2 [191]	5-1/8 [130]	5-3/8 [137]	19 [9]
6 [152]	11-1/2 [292]	8-1/4 [210]	5-7/8 [149]	34 [15]
8 [203]	12-1/4 [311]	9-1/4 [235]	6-1/2 [165]	35 [16]

**ENGINEERING SPECIFICATION:** ZURN ZN1400-HD-KC "Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, anchor flange with membrane flashing clamp collar and round, secured, scoriated heavy-duty polished nickel bronze top adjustable to finished floor .

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_ ZB D.C.C.I. with Polished Bronze Top
- \_\_\_ ZN D.C.C.I. with Polished Nickel Bronze Top\*

**SUFFIXES**

- \_\_\_ -AR Acid Resisting Epoxy Coated Finish
- \_\_\_ -BP Bronze Plug
- \_\_\_ -DC Duresist Cover
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -SA Stabilizer Assembly (See Z1035)
- \_\_\_ -SG Solid Gasketed Cover
- \_\_\_ -SM Special Marking Stamped on Top
- \_\_\_ -T Square Top
- \_\_\_ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
- \_\_\_ -VP Vandal-Proof Screws

**PIPE SIZE**

- 2,3,4,6 [51,76,102,152]
- 2,3,4,6,8 [51,76,102,152,203]
- 2,3,4,6,8 [51,76,102,152,203]

(Specify size/type) **OUTLET**

- \_\_\_ IC Inside Caulk
- \_\_\_ NH No-Hub
- \_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- See Chart
- See Chart
- See Chart

\* Regularly furnished unless otherwise specified.