




Z1910-2

8 X 8 [203 X 203] A.R.E. SANI-FLOR RECEPTOR
6 [152] SUMP DEPTH W/ 1/2 GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

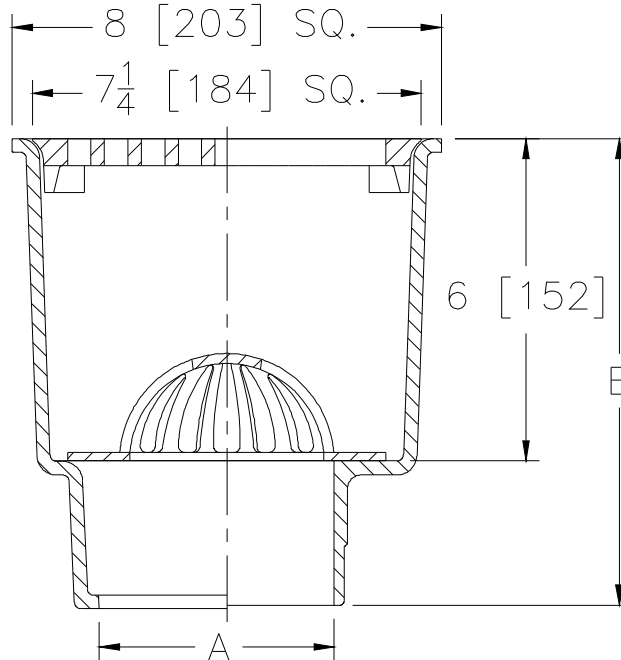

A Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	24 [11]	26 [168]

ENGINEERING SPECIFICATION: ZURN Z1910-2

Sani-Flor Receptor 8" x 8" x 6" [203mm x 203mm x 152mm] deep cast iron body, square medium-duty 1/2" [13mm] grate with 7/16" [11mm] slotted openings, white acid resisting porcelain enamel interior and top, and black ground enamel exterior coating, complete with ABS anti-splash interior bottom dome strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3,4 [76,102]
2,3,4 [51,76,102]
2,3,4 [51,76,102]

(Specify size/type) OUTLET

___ IC Inside Caulk
___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIMENSION

Z	ZN
8-3/4 [222]	9-1/4 [235]
8-5/8 [219]	9-1/8 [232]
8 [203]	8-1/2 [216]

PREFIXES

___ Z Cast Iron Body with White A.R.E. Interior*
___ ZN Cast Iron Body with White A.R.E. Interior, 8-9/16 [217] Square N.B. Frame and 1/2 Grate with 7/16 [11] Square Openings (Add 1/2 [13] to 8 [203] and 'E' Dim.)

SUFFIXES

___ -DX Dex-O-Tex Flange (ZN Only)	___ -31 Stainless Steel Mesh Liner for Bucket
___ -K Anchor Flange	___ -32 Aluminum Dome Strainer
___ -KC Anchor Flange with Seepage Holes and Clamp Collar	___ -33 White A.R.C. Anti-Splash Bottom Dome Strainer
___ -LD Less Bottom Dome Strainer	
___ -P 1/2 [13] Trap Primer Connection (See Z1023)	
___ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)	
___ -11 Vandal-Proof Secured Grate (ZN Only)	
___ -23 Aluminum Bucket	
___ -25 White A.R.C. Bucket	

* Regularly furnished unless otherwise specified.